


REV	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL P-0312-10	3/1/04
A	CHNG ELECT CHART & ADD NOTES	5/8/06
B	DIMENSION TOLERANCE CHANGES	12/2/08
C	DELETE OUTPUT FLUX COLUMN	3/24/10
D	LEAD LENTH TO 8.3 MIN.; DIA TO 0.6	5/18/15

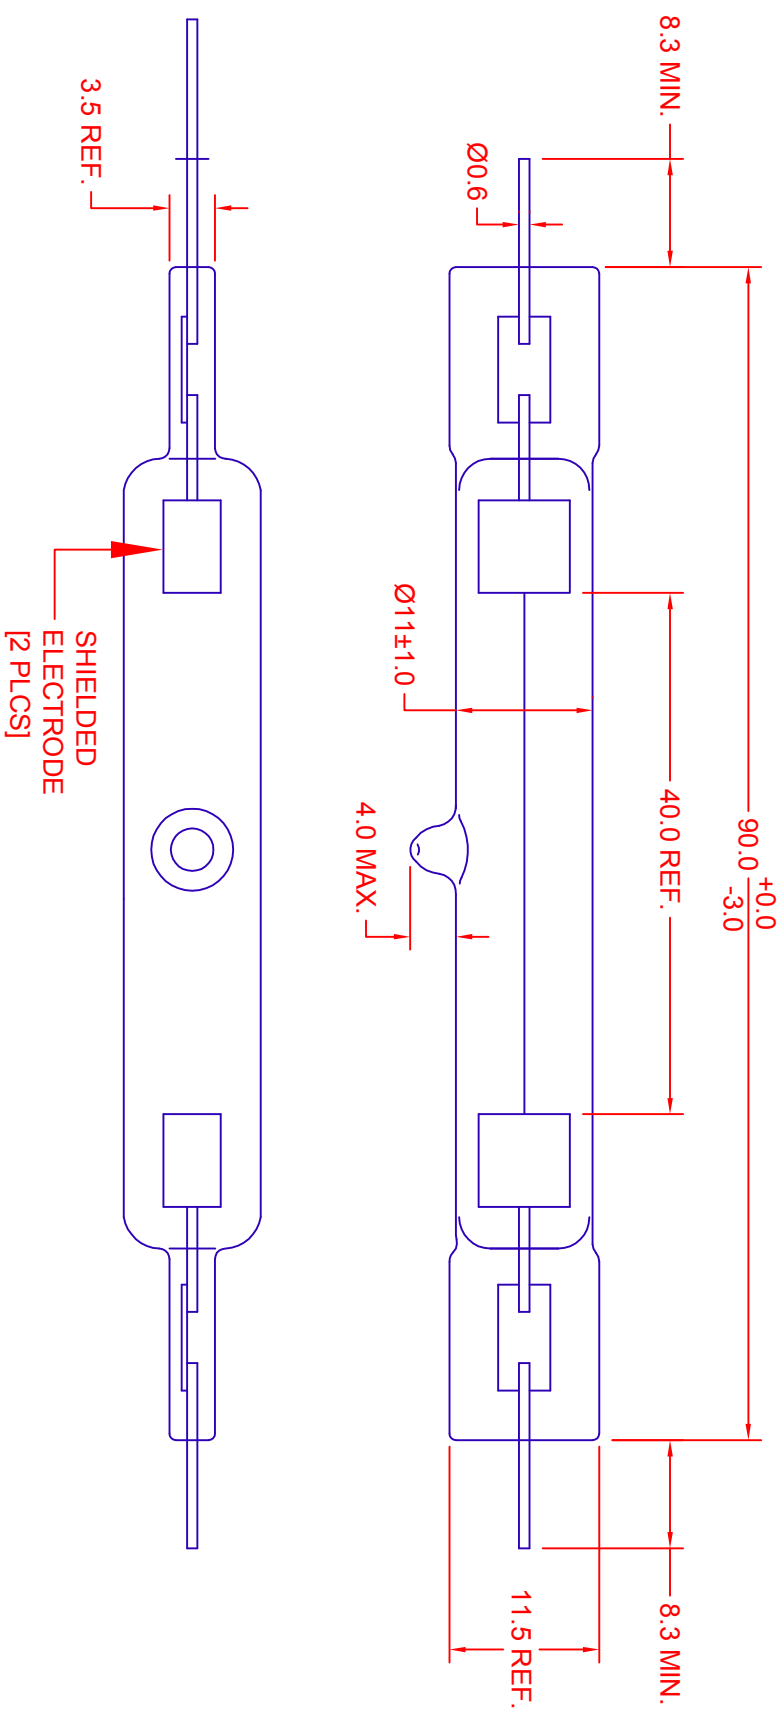

JKL PART NUMBER	STARTING VOLTAGE VS (Vrms)	OPERATING VOLTAGE VL (Vrms)	OPERATING CURRENT IL (mAmps)	LAMP WATTS	PEAK WAVELENGTH nm	OUTPUT INTENSITY uW/cm2 @ 1"	*RATED LIFE HOURS	GLASS PROSPHOR COLOR
BF1190-UVC/1	600	160	5 ± 0.5	0.75	253.7	550	20,000	CLEAR

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE OUTPUT BECOMES 50% OF THE INITIAL RATING.

ALL SPECIFICATIONS ARE TYPICAL WITH THE LAMP OPERATING AFTER STABILIZATION, AT AN AMBIENT TEMPERATURE OF 25°C.

CAUTION! DIRECT EXPOSURE MAY RESULT IN EYE DAMAGE.

Spectral output in the 253.7nm range is particularly dangerous to human vision. Even though this lamp has low power output, appropriate precautions should be taken at all times.

		METRIC DIMENSIONS ARE IN MILLIMETERS	
THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/- 0	
DRAWN BY L. WENGSTROM	APP'VD BY S.C.	DATE 5/18/15	DATE 5/18/15
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONE	RELEASED DATE 3/1/04
TITLE SHIELDED ELECTRODE ULTRAVIOLET LAMP		SIZE A	FSCM NO. 55335
JKL COMPONENTS CORPORATION		DRAWING NO. BF1190-UVC/1	REVISION DATE 5/18/15
		REV. NO. D	SHEET 1 OF 1